

Up to 530 watt

WST-NGX-D3

N-Type Bifacial Glass-Glass Series

Higher yield solar panel design for a wide range of utility applications



PERFORMANCE WARRANTY



COMPLIMENTARY INSURANCE





Power to Perform




www.winaico.com.au


DIMENSIONS

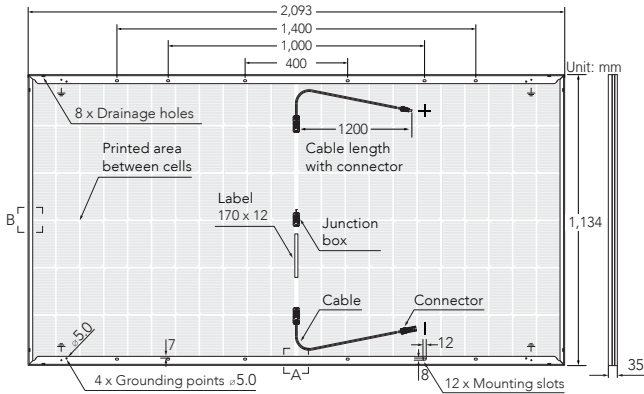

Frame cross section A



Frame cross section B



Mounting slot

PACKAGING



2,143 mm



1,145 mm



1,257 mm



31 modules



982 kg




40'HC

MECHANICAL DATA WINAICO WST-NGX-D3 SERIES

Cell	Monocrystalline, N-type, bifacial
Quantity and wiring of cells	132 (6 strings x 22 cells)
Bifaciality	Up to 80 %
Dimensions	2,093 x 1,134 x 35 mm (82.40 x 44.65 x 1.38 in)
Weight	29.7 kg (65.48 lbs)
Front-side glass	2.0 mm, tempered solar glass with anti-reflective coating
Back-side glass	2.0 mm, tempered solar glass, partially white printed
Encapsulant material	POE
Frame	Black anodised aluminium
Junction box	IP68, 3 bypass diodes
Connector type	Stäubli MC4-EVO2A IP68
Cable length (IEC/UL)	Cable 2 x 1.2 m / 4 mm ²
Fire safety class ⁴ (IEC61730)	C
Protection class (IEC 61140)	II

WINAICO PERFORMANCE GUARANTEE

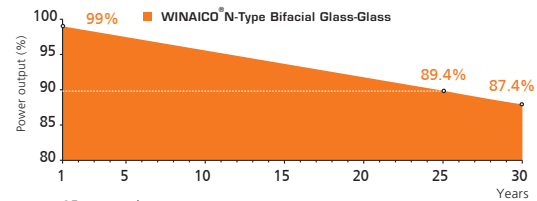

25-year product warranty.
Linear performance guarantee for 30 years.
No more than 0.4% degradation per year from 2nd year to 30th year.

Operating conditions

Operating temperature	
Maximum system voltage IEC/UL	
Maximum series fuse	
Maximum design load (push/pull)	
Maximum test load (push/pull)	
Nominal module operating temperature NMOT	
Temperature coefficient of P_{MAX}	
Temperature coefficient of V_{OC}	
Temperature coefficient of I_{SC}	
Certifications	

WINAICO WST-NGX-D3

-40 °C to +85 °C / -40 °F to +185 °F

1,500V/1,500V

30 A

3,600Pa/1,600Pa

5,400Pa/2,400Pa

42 ± 2 °C

-0.30%/°C

-0.25%/°C

0.045%/°C

IEC 61215-1:2016, IEC 61215-2:2016, IEC 61730-1:2016, IEC 61730-2:2016

Electrical data (STC)¹

Nominal performance	P_{MAX}	
Voltage at maximum performance	V_{MP}	
Current at maximum performance	I_{MP}	
Open circuit voltage	V_{OC}	
Short circuit current	I_{SC}	
Module efficiency		
Bifacial gain ³	10 % Pmpp	
	15 % Pmpp	
	20 % Pmpp	

WST-525NGX-D3

WST-530NGX-D3

Electrical data (NMOT)²

Nominal performance	P_{MAX}	
Voltage at maximum performance	V_{MP}	
Current at maximum performance	I_{MP}	
Open circuit voltage	V_{OC}	
Short circuit current	I_{SC}	

WST-525NGX-D3

WST-530NGX-D3

- Electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m² with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of P_{MAX} at STC: ±3%. Accuracy of other electrical data: ±10%.
- Electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20 °C, wind speed 1 m/s.
- The additional power gain from the rear side depends on the irradiance conditions at the installation site and the mounting situation.
- The fire safety test methods according to IEC 61730-2:2016 Annex B, Fire Tests of Roof Coverings.



WINAICO Australia Pty Ltd
Tel + 61 2 8091 2771
australia@winaico.com
https://www.winaico.com.au/
3/393 George Street, Sydney NSW 2000, Australia



WINAICO is a trademark of
Win Win Precision Technology Co., Ltd.

Win Win Precision Technology Co., Ltd
Tel + 886 3 568 8699 · info@w-win.com.tw
www.wvpt.com.tw · www.winaico.com
4F., No. 180, Sec. 2, Gongdao 5th Rd., East Dist.,
Hsinchu City 300, Taiwan R.O.C.
Made in China