



Product Service


CERTIFICATE

No. Z2 001256 0021 Rev. 01

Holder of Certificate: **Win Win Precision Technology Co., Ltd.**

4F., No.180, Sec/2, Gongdao 5th Road
East Dist.
30070 Hsinchu City
TAIWAN

Certification Mark:

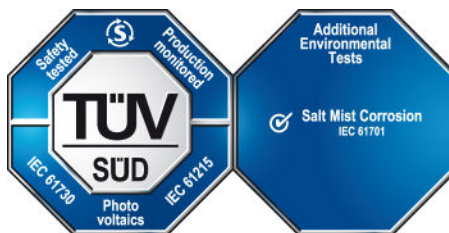

Product:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 701262215205-01

Valid until: 2027-06-23

Date, 2023-03-20

(David Bo)

CERTIFICATE

No. Z2 001256 0021 Rev. 01

Model(s):

All electrical data is shown as relative to this test conditions:

front side irradiance 1000 W/m², 25 °C, AM 1.5
WST-xxxNGX-D3 (xxx=400-430, in steps of 5)
WST-xxxNGX-D3 (xxx=445-475, in steps of 5)
WST-xxxNGX-D3 (xxx=485-525, in steps of 5)
WST-xxxNGX-D3 (xxx=530-575, in steps of 5)
WST-xxxMGX-D3 (xxx=385-415, in steps of 5)
WST-xxxMGX-D3 (xxx=425-460, in steps of 5)
WST-xxxMGX-D3 (xxx=470-505, in steps of 5)
WST-xxxMGX-D3 (xxx=510-555, in steps of 5)
WST-xxxMGT-D3 (xxx=565-620, in steps of 5)
WST-xxxNGXB-D3 (xxx=400-430, in steps of 5)
WST-xxxNGXB-D3 (xxx=445-475, in steps of 5)
WST-xxxNGXB-D3 (xxx=485-525, in steps of 5)
WST-xxxNGXB-D3 (xxx=530-575, in steps of 5)
WST-xxxMGXB-D3 (xxx=385-415, in steps of 5)
WST-xxxMGXB-D3 (xxx=425-460, in steps of 5)
WST-xxxMGXB-D3 (xxx=470-505, in steps of 5)
WST-xxxMGXB-D3 (xxx=510-555, in steps of 5)
WST-xxxMGTB-D3 (xxx=565-620, in steps of 5)
xxx stands for rated output power at STC

Maximum System Voltage: 1500 V DC Modules:

WST-xxxMGX-E3 (xxx=385-420, in steps of 5)
WST-xxxMGX-E3 (xxx=425-465, in steps of 5)
WST-xxxMGX-E3 (xxx=470-510, in steps of 5)
WST-xxxMGX-E3 (xxx=510-560, in steps of 5)
WST-xxxMGT-E3 (xxx=565-620, in steps of 5)
WST-xxxMGXB-E3 (xxx=385-420, in steps of 5)
WST-xxxMGXB-E3 (xxx=425-465, in steps of 5)
WST-xxxMGXB-E3 (xxx=470-510, in steps of 5)
WST-xxxMGXB-E3 (xxx=510-560, in steps of 5)
WST-xxxMGTB-E3 (xxx=565-620, in steps of 5)
xxx stands for rated output power at STC

Parameters:

Safety Class: Class II
Max. System Voltage: 1500V DC
Construction: Framed or Frameless, with
Junction box cable and connector.
Fire Safety Class: Class C according to UL790
Test method of salt mist test: test method 6
Corrosivity classification of module location: C5

Tested according to:

IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016
IEC 61701:2020